


Air Blower





Air Blower

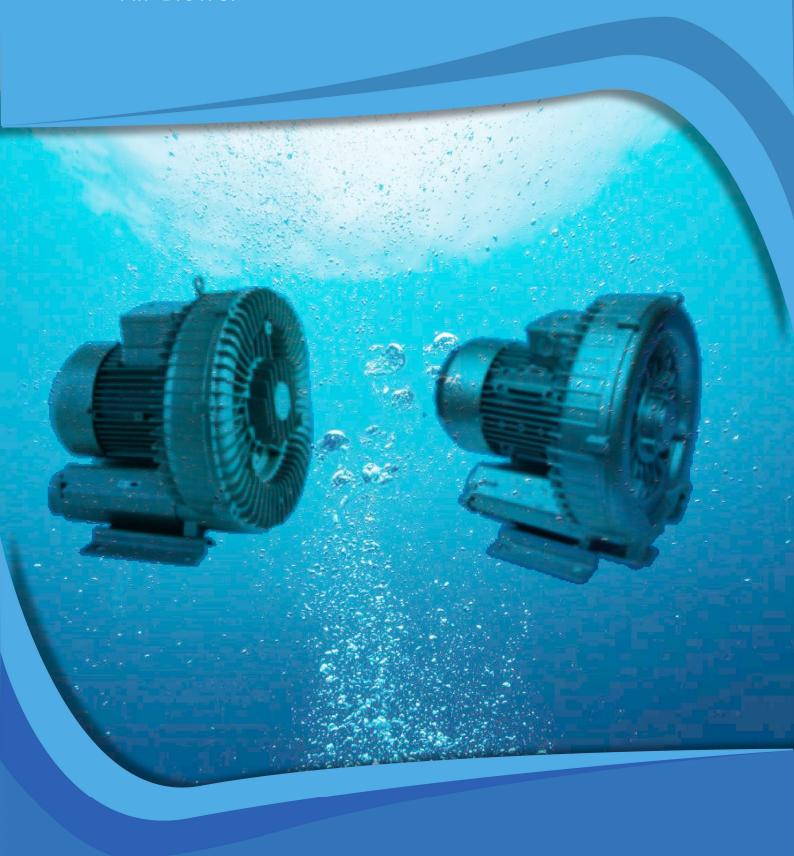

Code	Power (HP)	Displacement (M³/Hr)	Vacuum (mbar)	Pressure (mbar)	Noise (db)	Weight (kg)
GDBL-1/3-80	.5	80	-130	140	62	12
GDBL-1/3-145	1.0	145	-150	160	63	14
GDBL-1/3-210 F	1.5	210	-170	170	64	22
GDBL-1/3-210	2.0	210	-190	200	70	23
GDBL-1/3-210 P	3.0	210	-230	250	67	27
GDBL-1/3-320V	4.0	320	-270	290	69	37
GDBL-1/3-500	5.0	400	-290	330	77	40

Product Features:

- 1. Designed and improved by the latest technology, molded with high strength ADC 12 alluminium alloy, Processed on percision CNC machines.
- 2. Two-Pole motor with TEFC IP 54 and insulation F, high temperature resistant to 180°
- 3. In bearing structure makes dynamic stability.
- 4. The rotating parts are not contact with casing. No friction during operation. No internal lubrication needed
- 5. Sealing ring is placed between housing and moter to prevent entry of foreign matter, improve service life.
- 6. Wide range of powers and sizes, long term and quiety smooth operation.
- 7. All products are strictly tested before leaving the factory.

Product Applications:

Air blowers are suitable for all those applications requiring considerably higher pressure than that which can be achieved using centrifugal fans, It's widely used in environmental equipment,