


Pool Basin Equipment

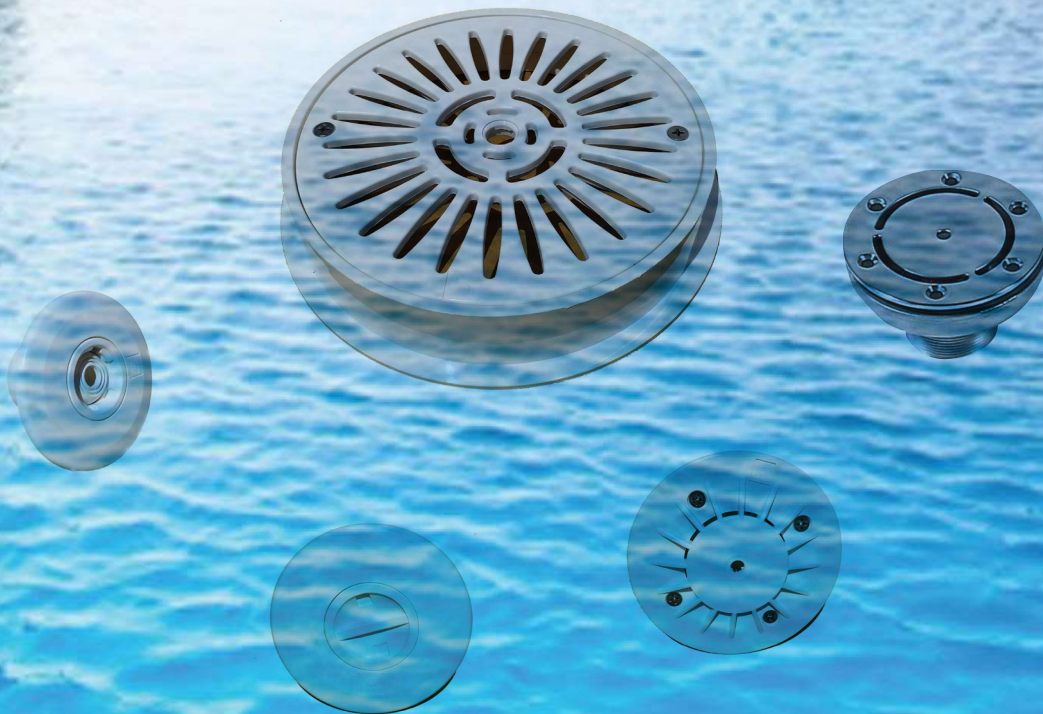

Skimmers ◀

Inlets & Suction Nozzles ◀

Drain Grill & Gutter Drain ◀

Main Drain ◀

Skimmers

Skimmers

GADS skimmers made of white injected ABS, UV resistant, this material cannot be altered by chemical and atmospheric agents. Round lid mounted on square or circular frame. silent weir flap and flow regulation plug, Adjustable rotating cover. Hinged lid attached by easily replaceable ABS rods. Extension collars allow added height to the deck ring. Vacuum plate allows you to vacuum directly through the basket, Inlet connection: 1 1/2". - Drain connection: Ø 63 mm. - Overflow connection: Ø 50 mm. - Recommended flow 5.0 - 7.5 m³/h. We recommend installing one skimmer for every 25 m² of water surface area.



Code No.	Description	Standard Packing	Weight (kg)	Volume (m ³)
SKM-301406	2" square lid skimmer	1	3.85	0.059



Code No.	Description	Standard Packing	Weight (kg)	Volume (m ³)
SKM-301407	Skimmer 2" with square lid for vinyl pools	1	3.85	0.059



Inlets & Suction Nozzles

Eye Ball Inlet Nozzle

GADS Eye Ball inlet nozzles made of white ABS UV resistant with adjustable ball, are for installation to the wall.

2" male thread, inner Ø 50 mm solvent connection. Can be installed with wall conduits: 15661-15660 & 2" FTA



Code No.	Description	Diameter (Ø)	Max. Flow (m³/h)
IN-301208	Concrete Eye Ball Inlet Nozzle Threaded - White	14/20/25	2.2/4.5/7
IN-301209	Concrete Eye Ball Inlet Nozzle Threaded - Black	14/20/25	2.2/4.5/7

Eye Ball Inlet Nozzle to Glue PN6

GADS Eye Ball inlet nozzles made of white ABS UV resistant with adjustable ball, are for installation to the wall.

To glue onto Ø 63 mm, outside 6 bar pipe and inside Ø 50 mm.



Code No.	Description	Diameter (mm)	Max. Flow (m³/h)
IN-301206	Concrete Eye Ball Inlet Nozzle Non Threaded - White	14/20/25	2.2/4.5/7
IN-301207	Concrete Eye Ball Inlet Nozzle Non Threaded - Black	14/20/25	2.2/4.5/7

Floor Inlet Nozzle

Floor Inlet with adjustable flow (from 0 to 100%), Made in ABS, UV resistant, screw in S.S., are for installation on the floor of the pool. Max. flow: 12 m³/h.

2" male thread, inner Ø 50 mm solvent connection. Can be installed with 2" FTA.

To glue onto Ø 63 mm, outside 6 bar pipe and inside Ø 50 mm.



Code No.	Description	Connection (mm)	Max. Flow (m³/h)
IN-301201	Concrete Floor Inlet - Non Threaded - White	50	12
IN-301202	Concrete Floor Inlet - Non Threaded - Black	50	12
IN-301203	Concrete Floor Inlet Nozzle Threaded - White	50	12
IN-301204	Concrete Floor Inlet Nozzle Threaded - Black	50	12

Inlets & Suction Nozzles

Suction Nozzle to Glue Ø63

GADS Suction / Vacuum nozzles, Made in ABS, UV resistant. closing by 1 1/2" threaded plug.
To glue onto Ø 63 mm, outside 6 bar pipe and inside Ø 50 mm.



Code No.	Description
VC-301301	Concrete Vacuum / Suction Nozzle Non Threaded - White
VC-301302	Concrete Vacuum / Suction Nozzle Non Threaded - Black

Suction Nozzle 2" Male Thread

GADS Suction / Vacuum nozzles, Made in ABS, UV resistant. closing by 1 1/2" threaded plug,
2" male thread, inner Ø 50 mm solvent connection.



Code No.	Description
VC-301303	Concrete Vacuum / Suction Nozzle Threaded - White
VC-301304	Concrete Vacuum / Suction Nozzle Threaded - Black

Wall Conduit

Wall conduit for concrete swimming pools, made of white ABS. This component is embedded in concrete during the construction work, thus preserving the nozzles from possible jamming or deterioration due to concrete.



Code No.	Description
WC-301306	Wall Conduit - Non Threaded
WC-301307	Wall Conduit - ABS 2" Threaded

Drain Grill & Gutter Drain

Drain Grill

Ring support and grill made in ABS, UV resistant. Supplied with grill fixing screws, it replaces the drain in installations with drainage made by work construction.



Code No.	Description
DG-301401	200mm Dia Main Drain Grill With Frame - White
DG-301402	200mm Dia Main Drain Grill With Frame - Black
DG-301403	200mm Dia Main Drain Grill Without Fram

Gutter Drain

GADS gutter drain for concrete swimming pools, Body and grill made in ABS. rectangular grill fixed with stainless steel screw. This component can be used both in channels of swimming pools with overflow and on walls, Max. recommended flow: 7 m³/h. To be glued to Ø 63 mm pipe



Code No.	Description
GDN-301404	Gutter drain - ABS - White
GDN-301405	Gutter drain - ABS - Black



Inlets & Suction Nozzles in SS-316

SS Ball Inlet

Male thread 1 1/2". Made in S.S. AISI-316.

Recommended max. flow 4.5 m³/h. Ball Ø 20 mm.



Code No.	Description	Diameter(Ø)	Max.Flow (m ³ /h)
IN-301210	S. S. Return inlet-Length 35mm	20 mm	4.5
IN-301211	S. S. Return inlet-Length 50mm	20 mm	4.5
IN-301212	S. S. Return inlet-Length 70mm	20 mm	4.5

SS Floor Inlet

Male thread 2". Made in S.S. AISI-316. For concrete pools. Water flow can be adjusted by the central screw. Recommended max. flow 14 m³/h.



Code No.	Description	Connection	Max.Flow (m ³ /h)
IN-301205	Concrete SS 316 Floor Inlet Nozzle Male Threaded Brush Finish	50 mm	14

SS Suction/Vacuum Point

Male thread 1 1/2" With lid, Made in S.S. AISI-316.



Code No.	Description
VC-301305	Concrete SS 316 Vacuum / Suction Nozzle Male Threaded Brush Finish

Drain Grill & Wall Conduit in SS-316

Stainless Steel Drain Grills

Drain frame & grille. Made in S.S. AISI-316 chrome / brush finish. Supplied with grille fixing screws. Frame and Grill are suitable for private and commercial pool applications. Main drain is used for emptying the pool.



Code No.	Description	Max. Flow
DG-SS-316-01	Stainless Steel Drain Grills With SS Frame Size 200mmX200mm	15 m ³ /h (0.5 m/s)
DG-SS-316-02	Stainless Steel Drain Grills With SS Frame Size 300mmX300mm	43 m ³ /h (0.5 m/s)
DG-SS-316-03	Stainless Steel Drain Grills With SS Frame Size 400mmX400mm	83 m ³ /h (0.5 m/s)
DG-SS-316-04	Stainless Steel Drain Grills With SS Frame Size 500mmX500mm	136 m ³ /h (0.5 m/s)

Stainless Steel Main Drain Grill Ø 200 mm



Code No.	Description	Diameter	Max. flow
DG-301401-SS	Stainless Steel Main Drain Grill	200mm	13 m ³ /h

Support ring in white ABS, grill in S.S. 18/8/2 AISI-316. Complete with grill fixing screws.

Stainless Steel Wall Conduit

Made of S.S. AISI-316. Both ends with male thread of 1 1/2". Earth connection.



Code No.	Description
DG-301410-SS	Stainless Steel Wall Conduit - 240mm
DG-301411-SS	Stainless Steel Wall Conduit - 340mm